


Parts: - all sides are interchangeable, don't worry about left or right! -
 2x desk side (**T**), folded
 2x roof support (**D**), with two foldable arms
 4x horizontal support (**A**), one with diagonal supports (**Q**)
 2x storm props (**St**) (excl. i1.5D)
 3x table top boards (**B**)
 1x front cover (**ThV**)
 1x **Tarpaulin** for roof & attached back
 with 3x **A** inside (i1.5D only roof, no back)



No tools needed,
 just one person
 and a bit of practice.
 Desk can be used
 separately.
 Plug in the roof supports
 into the desk,
 canvas over it,
 tighten, - done!

- 1.) Fold out a desk side T, plug in support A with Q and rest A on the ground.
- 2.) Plug in second desk side T using 2x 2 hinges.
- 3.) Plug in support A in the inside center of the side parts - half height, slightly angular.
- 4.) Plug in support A with front cover ThV, fix ThV with rubber strings under feet of T.
- 5.) Plug in roof supports D left and right into the 3 hinges in T press firmly. (Use the lever provided to unmount.)
- 6.) Plug in support A at top of D.
- 7.) Put the three table boards B onto supports A, the one B with the smooth side on the outside.
 (The desk can be used separately without the roof.)
- 8.) Fold out roof supports D and fix them using the locking pins so their arms look like a V (lower position).
- 9.) Now take the tarpaulin out of the bag and rest the rolled up tarpaulin onto the back side of the roof supports D. Make sure the rolled up back cover shows to the back/the velcro on the gable is inside the stall. Roll out some canvas and plug in the integrated support into hinges at back ends of the roof supports.
- 10.) Roll out the full roof lifting (the desk supports your weight) or gently throwing over the top to the front. Plug in the integrated support into the ends at the front.
- 11.) Tighten roof by pushing the roof supports upwards, first both sides to the middle locking position, then both sides to the top (arms locked horizontally with the locking pin).
- 12.) Roll down back part of tarpaulin and plug in the integrated support into the unfolded storm props St. Then pull down to straighten the back and to plug vertical storm props St into the hinges in D at the top. Adjust the storm props St locking the aluminum tip with screw.

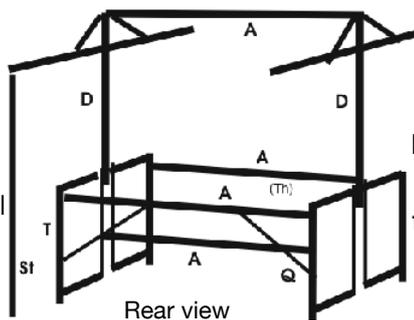

Always dry the canvas and store it in a dry place!