


Assembly guide klipklap Market Stall - short version!

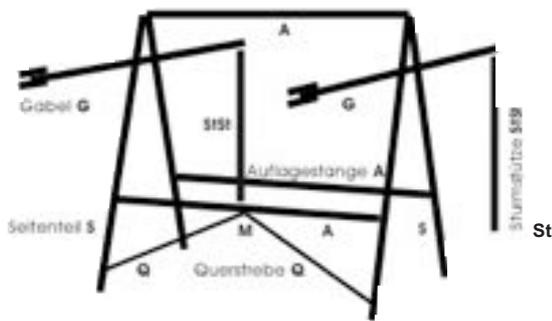

Parts Stall K2 (+ further sections to K4, K6 ...)

2 Side parts (Seitenteile) S
- with Diagonal supports in front - Q

2 Gabeln G

3 Auflagestangen (Pins) A
- one of it with screw nut M - M
& butterfly screw M8 x 80 -

2 Storm-props (Sturmstützen) r./l. St

4 Counter boards (Auflagebretter)

1 Tarpaulin (Plane) - crossbars inside 2 + 1 -

1. Start with the pack of 3 Auflagestangen **A**, unscrew and select the one with the screw nut **M** in it, fit it to one of the Seitenteile **S** (side parts) - see **Pic 1** - Diagonal supports **Q** on **S** face to the front. Fit the second **S** to opposite side of **A** as **Pic 2**. Take both **Q** to the middle of **A** (screw nut! **M**) and fix it from the inside with the butterfly screw - see **Pic 3 + 4**.



You can do it without help of a second person!

- use **A** to support **S**,

- lift **A** carefully, plug in second **S**,

- screw **Q** with **M** in the middle from the inside!

2. Plug in the two other **A** in rear and top. (to reach the top you can knee/step on both **A** near **S**.)

Plug in Gabeln **G** to **S** by opening it till it fits to the hinges - see **Pic 5**. and secure it by turning the wooden locking bolts tight.


Both Gabeln **G** fit to the right side of the side parts **S**! - **no symmetry!** - see **Pic 6**.



All **G** fit to the **right side** of **S**!
- **no symmetry!**
- no left or right parts!

4 Counter boards for each section fit between **A** - see **Pic 7**

Further sections of the market stall can be plugged in on both sides, **endlessly!** - the attached section needs no screw.

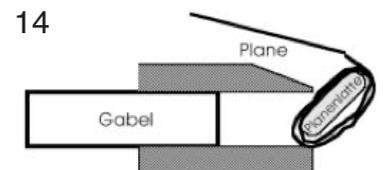

Tighten the canvas, so no water can collect on top!
- Turn in, brace, pin!

3. Put the canvas roll on both Gabel **G** from back side (hands free & no weight to support!)- as **Pic 8**., then roll down the

back wall part (and a bit more) till the inner wooden pin is visible. Plug in this pin to the back side hinges of **G** - see **Pic 9**.

Unroll more canvas of the roof part afterwards - as **Pic 10**. and throw the rest roll over the top to the front - see **Pic 11**.



Tighten the canvas, so no water can collect on top! - **Pic 14**.

Now the tarpaulin has to be rolled in till the front pin fits strong into the Gabel **G** - see **Pic 12**. When the canvas is rolled out the pin inside can be adjusted so that (when rolled in) the canvas fits tight. The canvases of further sections of the market stall can be pinned on overlapping.

Zipfel stall: Now put in the support ("Rakete") in Zipfel (-you can knee on the table near **S** for help - like **Pic 13**.).

4. Plug in left & right Storm-prop **St** first down in to backwall of the tarpaulin, then up in the hinges at the back of **G** by pushing it down to straighten the back. Adjust the Storm-props and lock aluminum tip with screw. (**middle St** with double hinges)

5. For transport screw the three **Auflagestangen A** to a pack so the butterfly screw can not get lost.

6. **Always dry** the canvas and store it dry! (never use the PVC-Stangensack for the canvases!)

- if you have any questions please call: 0049 339 28 29 50 19 or mobile 0049 179 54 212 55 - post @ klipklap.de